

# 451B-DE-SI

## Ion Chamber Survey Meter with Beta Slide

### Technical Data



The 451B state-of-the-art ion chamber survey meter is a handheld battery operated unit designed for use in both rugged and normal environments. The 451B-DE-SI is ideally suited for area monitoring to insure radiation worker safety. The moveable beta shield permits measurement of Deep-Dose Equivalent ( $H^*(10)$ ) and Shallow-Dose Equivalent ( $H^*(0.07)$ ) exposure per United States Nuclear Regulatory Commission and International Commission on Radiation Units & Measurements definitions. The 451B auto-ranges and measures radiation rate and accumulated dose from various radiation sources (alpha, beta, x-ray, gamma). The ion chamber detector allows for a fast response time to radiation from leakage, scatter beams, and pinholes. Additionally, the low-noise chamber bias supply provides for fast background-settling time.

The digital display features an analog bar graph, 2.5 digit readout, low battery indicator, freeze (peak hold) mode indicator, and an automatic backlight function. User controls consist of an ON/OFF button and a MODE button. The case is constructed of lightweight, high strength materials and is sealed against moisture.

The RS-232 interface can be connected directly to a computer for use with the Excel add-in for Windows (451EXL), enhancing the functionality of the instrument. This software allows for data retrieval, user parameter selection and provides a virtual instrument display with audible (requires sound card) and visual alarm indication.

### Key features


- Measures skin dose (slide open) and deep dose (slide closed)
- High sensitivity measurement of rate and dose simultaneously, with the capability to record peak rate
- Auto-ranging and auto-zeroing
- RS-232 communications interface with optional Windows-based Excel add-in for data logging
- Ergonomic, anti-fatigue handle with replaceable grip, wrist strap and tripod mount
- Programmable flashing LCD display
- Easily-accessible battery door (operated by two 9-volt alkaline batteries) on the outside of the bottom case



## Specifications

<b>Radiation detected</b>	Alpha	> 7.5 MeV
	Beta	> 100 keV
	Gamma	> 7 keV
<b>Operating ranges, response time</b>	0 to 50 μSv/h (8 sec) 0 to 500 μSv/h (2.5 sec) 0 to 5 mSv/h (2 sec) 0 to 50 mSv/h (2 sec) 0 to 500 mSv/h (2 sec)	
<b>Accuracy</b>	Within 10 % of readings between 10 % and 100 % of full scale indication on any range, exclusive of energy response (calibration source is <sup>137</sup> Cs)	
<b>Detector</b>	Chamber (cc volume air ionization)	349 cc
	Chamber wall (phenolic)	246 mg/cm <sup>2</sup>
	Chamber window (mylar)	6.6 mg/cm <sup>2</sup>
	Beta slide	440 mg/cm <sup>2</sup>
	451B-DE-SI	In order to achieve energy response consistent with measurements of H*(10) as required by ICRU-47, aluminum has been added to the back wall, 38 % of the side wall area, and to the beta slide. With the Beta Shield open, the 451B-DE-SI can measure skin dose at 10*(0.07), and Deep Dose H*(10) with Beta Shield closed
	Controls	ON/OFF and MODE
<b>Automatic features</b>	Auto-zeroing, auto-ranging, and auto-backlight	
<b>Warm-up time</b>	One minute	
<b>Display LCD analog/digital with backlight</b>	Analog	100 element bar graph 6.4 cm long. Bar graph is divided into 5 major segments, each labeled with the appropriate value for the range of the instrument
	Digital	2.5 digit display is followed by a significant zero digit depending on the operating range of the instrument. The units of measurement are indicated on the display at all times. Digits are 6.4 mm (0.25 in) high. Low battery and freeze indicators are also provided on the display
<b>Modes</b>	Integrate mode	Operates continuously 30 seconds after the instrument has been turned on. Integration is performed even if the instrument is displaying in μSv/h or mSv/h
	Freeze mode	Will place a tick mark on the bar graph display to hold on the peak displayed value. The unit will continue to read and display current radiation values

<b>Environmental</b>	Temperature range	-20 °C to 70 °C (-4 °F to 158 °F)
	Relative humidity	0 % to 100 % non-condensing (at 140 °F)
	Geotropism	< 1 %
<b>Typical energy dependence</b>	<sup>16</sup> Nitrogen gamma rays are 110 % to 120 % of indicated readings as determined at the University of Lowell	
<b>Power requirements</b>	Two 9 V alkaline, 200 hours operation	
<b>Dimensions (WxDxH)</b>	10 cm x 20 cm x 15 cm (4 in x 8 in x 6 in)	
<b>Weight</b>	1.11 kg (2.5 lb)	

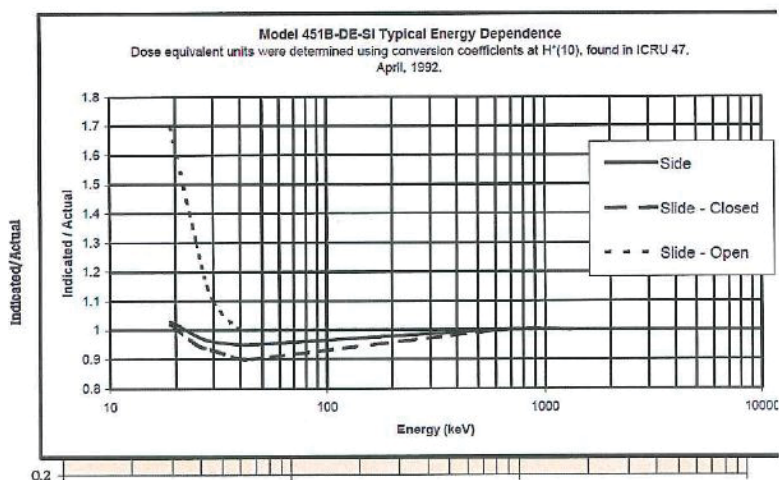

## Ordering Information

### Models

**451B-DE-SI-RYR** Ion Chamber Survey Meter with Beta Slide and dose equivalent chamber

### Optional accessories

**451EXL** 451 Assistant for Excel, includes RS-232 interface cable

**190HPS** Single Unit Carrying Case

**62-103** Check Source, <sup>137</sup>Cs, 10 µCi. Flat disc, 1-inch diameter

**450UCS** Check Source, <sup>238</sup>Uranium, 0.064 µCi, impregnated, 2 in x 2 in yellow card

### About Fluke Biomedical

Fluke Biomedical is the world's leading manufacturer of quality biomedical test and simulation products. In addition, Fluke Biomedical provides the latest medical imaging and oncology quality-assurance solutions for regulatory compliance. Highly credentialed and equipped with a NVLAP Lab Code 200566-0 accredited laboratory, Fluke Biomedical also offers the best in quality and customer service for all your equipment calibration needs.

Today, biomedical personnel must meet the increasing regulatory pressures, higher quality standards, and rapid technological growth, while performing their work faster and more efficiently than ever. Fluke Biomedical provides a diverse range of software and hardware tools to meet today's challenges.

### Fluke Biomedical Regulatory Commitment

As a medical test device manufacturer, we recognize and follow certain quality standards and certifications when developing our products. We are ISO 9001 and ISO 13485 medical device certified and our products are:

- CE Certified, where required
- NIST Traceable and Calibrated
- UL, CSA, ETL Certified, where required
- NRC Compliant, where required

### Fluke Biomedical.

*Better products. More choices. One company.*

#### Fluke Biomedical

6045 Cochran Road  
Cleveland, OH 44139-3303 U.S.A.

#### Fluke Biomedical Europe

Science Park Eindhoven 5110  
5692EC Son, The Netherlands

#### For more information, contact us:

In the U.S.A. (800) 850-4608 or  
Fax (440) 349-2307  
In Europe/M-East/Africa +31 40 267 5435 or  
Fax +31 40 267 5436  
From other countries +1 (440) 248-9300 or  
Fax +1 (440) 349-2307  
Email: sales@flukebiomedical.com  
Web access: www.flukebiomedical.com

©2013 Fluke Biomedical. Specifications subject to change without notice. Printed in U.S.A.  
6/2013 6000302A\_EN

**Modification of this document is not permitted without written permission from Fluke Corporation.**